



1500mm*150mm 66W

Features and Advantages

- Ultra slim and minimalistic panel design
- TUV CE/SAA external constant current driver adopted
- Epistar SMD LED Chip
- Slim white-anodised Aluminium border for classic minimalist style
- Soft and uniform lighting for comfortable viewing environment
- Life span of 80,000h with low light decay
- High stability and reliability
- 5-year Warranty

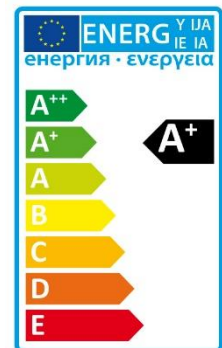

DIMENSIONS

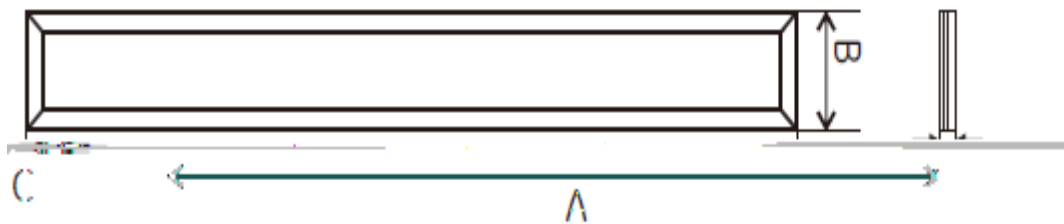

ITEM	A	B	C
LED RECTANGULAR PANEL	1496mm	150mm	12mm

1500mm*150mm 66W

SPECIFICATIONS

Physical Specifications

Size (mm)	1500*150
Materials	AL Frame + PMMA diffuser
IP Class	IP20
Installation	Recessed
Net Weight	2800g
Work Environment	Indoor

Electrical Specifications


Input Voltage	85V-265V AC
Frequency Range	50/60Hz
Power Factor	>0.9
Power	66W
Certification	CE, RoHS
Protection Function	Over-current protection, Surge Protection
Operation Temperature	-25°C ~ 50°C
Lifespan	50.000 hours

Optical Specifications

Luminous Efficiency (lm/w)	>90
Color Temperature (CCT)	3000K/4000K/6000K
Lumen Flux	5940 LM
Color Rendering Index	≥80
Beam Angle	120° - 180°

1500mm*150mm 66W

PHOTOMETRIC DATA

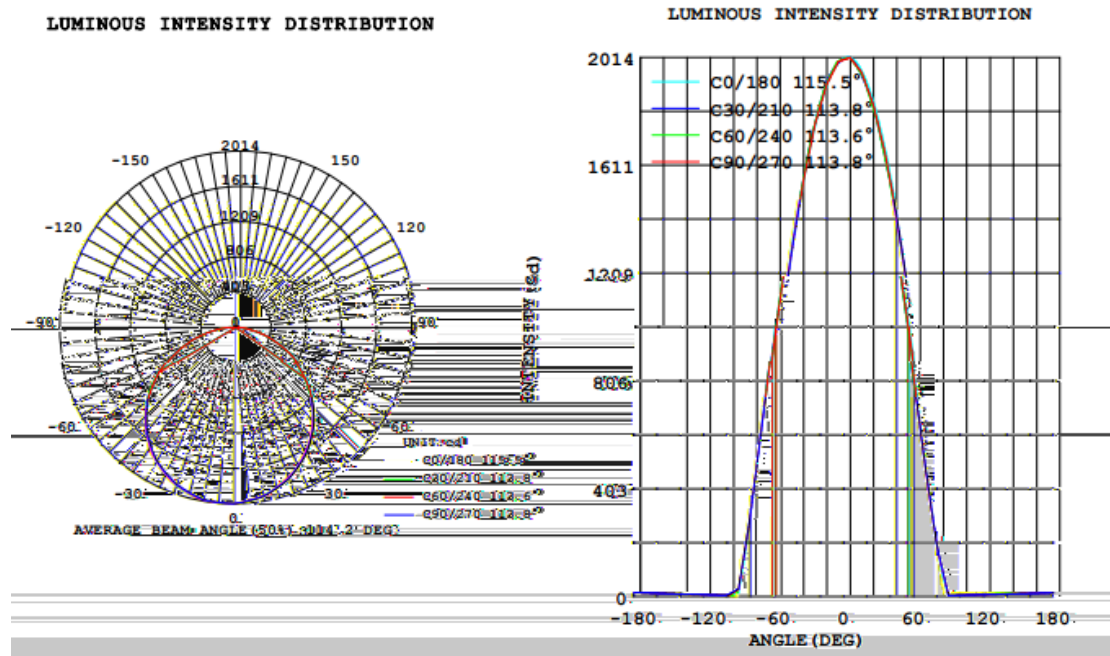

Height	AVR E	CENTER E	Diameter
1.50m	254.281x	894.591x	464.35cm
2.00m	143.041x	503.211x	619.13cm
4.00m	35.761x	125.801x	1238.25cm
4.50m	28.251x	99.401x	1393.04cm
6.00m	15.891x	55.911x	1857.38cm

Angle: 114.3deg