


6W, 20W, 36W


Features and Advantages



- Ultra slim and minimalistic panel design
- TUV CE/SAA external constant current driver adopted
- Epistar SMD LED Chip
- Slim white-anodised Aluminium border for classic minimalist style
- Soft and uniform lighting for comfortable viewing environment
- Life span of 80,000h with low light decay
- High stability and reliability
- 5-year Warranty

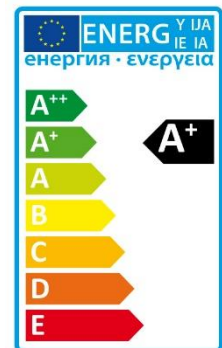

DIMENSIONS

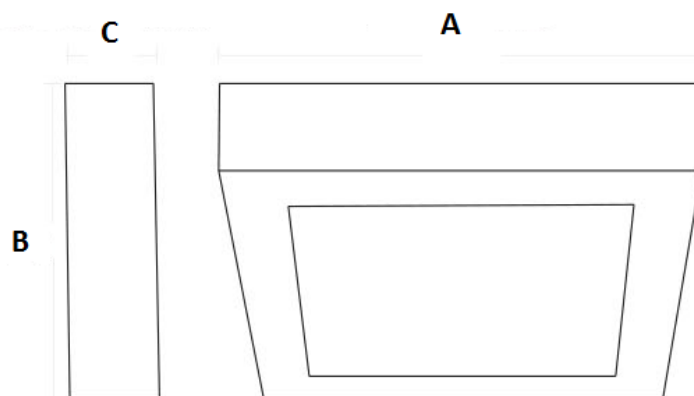

ITEM	A	B	C
LED SQUARE PANEL	120mm	120mm	38mm
LED SQUARE PANEL	230mm	230mm	38mm
LED SQUARE PANEL	400mm	400mm	38mm

6W, 20W, 36W

SPECIFICATIONS

Physical Specifications

Size (mm)	120*120	230*230	400*400
Materials	AL Frame + PMMA diffuser		
IP Class	IP20		
Installation	Wall Mounted		
Net Weight	650g	850g	1200g
Work Environment	Indoor		

Electrical Specifications

Input Voltage	85V-265V AC		
Frequency Range	50/60Hz		
Power Factor	>0.9		
Power	6W	20W	36W
Certification	CE, RoHS		
Protection Function	Over-current protection, Surge Protection		
Operation Temperature	-25°C ~ 50°C		
Lifespan	80.000 hours		

Optical Specifications

Luminous Efficiency (lm/w)	>80		
Color Temperature (CCT)	3000K	4000K	6000K
Lumen Flux	600 LM	1800 LM	3250 LM
Color Rendering Index	≥80		
Beam Angle	120° - 180°		

6W, 20W, 36W

PHOTOMETRIC DATA

