



Features and Advantages



- Ultra slim and minimalistic panel design
- TUV CE/SAA external constant current driver adopted
- Epistar SMD LED Chip
- Slim white-anodised Aluminium border for classic minimalist style
- Soft and uniform lighting for comfortable viewing environment
- Life span of 80,000h with low light decay
- High stability and reliability
- 5-year Warranty

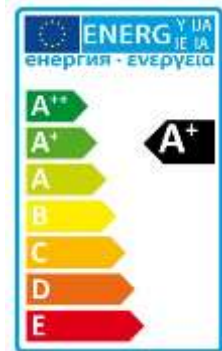

DIMENSIONS

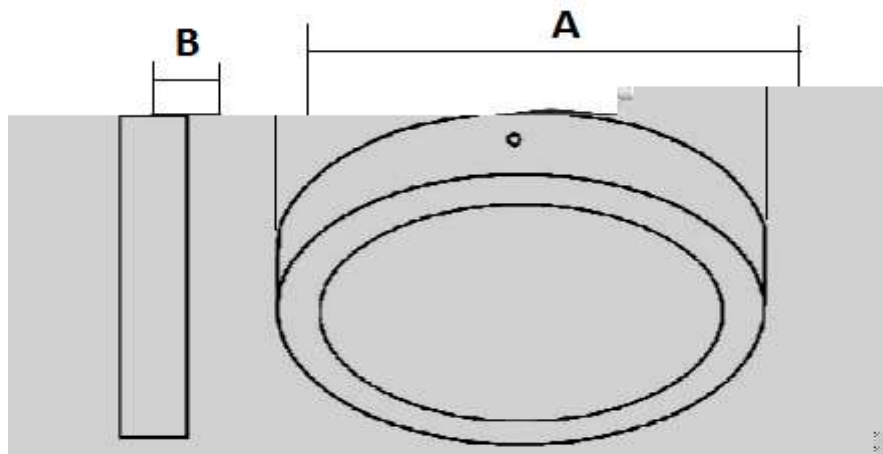

ITEM	A	B
LED ROUND PANEL	170mm	35mm
LED ROUND PANEL	225mm	35mm
LED ROUND PANEL	300mm	35mm
LED ROUND PANEL	600mm	35mm

SPECIFICATIONS

Physical Specifications

Size (mm)	170*35	225*35	300*35	600*35
Materials	AL Frame + PMMA diffuser			
IP Class	IP20			
Installation	Wall Mounted			
Net Weight	450g	550g	1250g	1550g
Work Environment	Indoor			

Electrical Specifications

Input Voltage	85V-265V AC			
Frequency Range	50/60Hz			
Power Factor	>0.9			
Power	14W	20W	26W	48W
Certification	CE, RoHS			
Protection Function	Over-current protection, Surge Protection			
Operation Temperature	-25°C ~ 50°C			
Lifespan	80.000 hours			

Optical Specifications

Luminous Efficiency (lm/w)	>80			
Color Temperature (CCT)	3000K/4000K/6000K			
Lumen Flux	1150 LM	1590 LM	2050 LM	4320 LM
Color Rendering Index	≥80			
Beam Angle	120° - 180°			

PHOTOMETRIC DATA

