


30W, 150W


Features and Advantages



- Ultra slim and minimalistic panel design
- TUV CE/SAA external constant current driver adopted
- Epistar SMD LED Chip
- Slim white-anodised Aluminium border for classic minimalist style
- Soft and uniform lighting for comfortable viewing environment
- Life span of 80,000h with low light decay
- High stability and reliability
- 5-year Warranty



DIMENSIONS

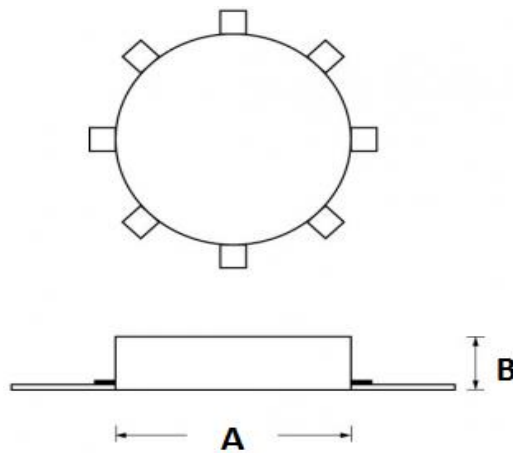

ITEM	A	B
LED ROUND PANEL	464mm	125mm
LED ROUND PANEL	964mm	125mm

30W, 150W

SPECIFICATIONS

Physical Specifications

Size (mm)	464*125	964*125
Materials	AL Frame + PMMA diffuser + Aluminium	
IP Class	IP20	
Installation	Recessed	
Net Weight		
Work Environment	Indoor	

Electrical Specifications

Input Voltage	85V-265V AC	
Frequency Range	50/60Hz	
Power Factor	>0.9	
Power	30W	150W
Certification	CE, RoHS	
Protection Function	Over-current protection, Surge Protection	
Operation Temperature	-25°C ~ 50°C	
Lifespan	80.000 hours	

Optical Specifications

Luminous Efficiency (lm/w)	>80	
Color Temperature (CCT)	4000K	
Lumen Flux	3050 LM	15000 LM
Color Rendering Index	≥80	
Beam Angle	120° - 180°	

PHOTOMETRIC DATA

